


ENTRY-GUARD™ (P/N: ETG-CP)

Entry-Guard™ control panel is a safety interlock system (SIS) that provides a fail-safe access control system (ACS). This panel works with other components to ensure that unauthorized personnel are prohibited from areas where laser radiation may be present.

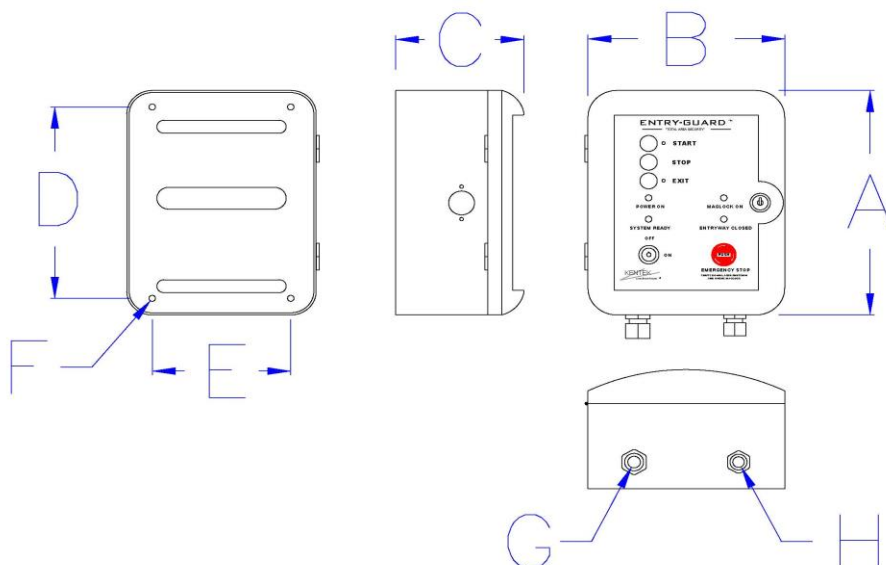

- Light weight, impact resistant polymer housing
- Safe low voltage input power 12 VDC
- Versatile design allows for integration between existing entryway components and new components

Specifications	
Outside Dimensions	A = Height: 10.50" [266.7mm]
	B = Width: 8.37" [212.6mm]
	C = Depth: 6.00" [152.4mm]
Mounting Pattern	D = Height: 9.00" [228.6mm]
	E = Width: 6.00" [154.4mm]
	F = Diameter: 0.28" [7.1mm]
Bulkhead Fitting	G = Diameter range: 0.39" to 0.56" [9.9mm to 14.2mm]
	H = Diameter range: 0.24" to 0.47" [6.1mm to 11.9mm]
Input Voltage	Wall transformer: 120 VAC converted to 12 VDC
Current Draw	0.5 amps
Weight	3 lbs [1.36 kgs]